



应用领域

用于机器人、航空航天设备、高铁地铁、电力发电、铁路轨道交通、船舶、化学工业、通信系统、工业设备连接、工业自动化设备、机床机械设备、照明设备、电气绝缘保护系统等室内外环境的电线电缆保护。

PLASTIC CABLE GLAND SERIES

塑料电缆接头系列

塑料电缆接头系列是一种用于紧固电线电缆,并达到一定的IP防护等级和抗拉、抗扭能力的产品,适用于电源进线、仪表、照明、灯具、电气箱等,及一切要求整体或部分达到防水、防尘、抗拉等需求的机械设备。

Cable gland series are used for tightening the wire and cable,achieve a certain degree of IP protection, have strong tensile and torsional ability.Applied to the power line, instrumentation, lighting,lamps, electrical boxes, and machinery equipments with requirements for integral or partical ability of waterproof, dustproof, tensile strength,etc.



SGS RoHS CE

LNE-K 塑料电缆防水接头
Nylon Waterproof Cable Gland




产品材质: A,C,D,F部位采用尼龙制成, B,E部位采用丁腈橡胶制成。
 螺纹尺寸: 公制 (M)
 工作温度: -40°C至+100°C, 短时可达+120°C。
 产品颜色: 黑色、灰色 (特殊颜色可定做)。
 产品认证: RoHS认证、CE认证
 防护等级: IP68
 产品特性: 特殊夹紧爪与密封件特殊设计, 配合迫紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。

Product material are: Part A, C, D and F are PA material; Part B and E Chemigum material.
Specification of thread: Metric
Working temperature: -40°C ~ +100°C, instantaneously can be 120°C.
Color: Black and gray (Customized colors are available).
Certification: RoHS, CE
Protection classification: IP68
Property: With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification has a scope clamping with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

SGS RoHS CE

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	螺纹标准(公制) Thread standard(M)	卡口范围(mm) Range Of Bayonet	外径(mm) Outer Diameter	螺纹长度(mm) Thread Length	(mm)	包装单位(只/包) Packaging Unit
No.	No.	M	Φ	AG	GL	H1+H2	PCS
LNE-K-M12B-6	LNE-K-M12G-6	M12×1.5	3-6	12.0	8.0	20.0	100
LNE-K-M14B-8	LNE-K-M14G-8	M14×1.5	4-8	14.0	8.0	22.0	100
LNE-K-M16B-8	LNE-K-M16G-8	M16×1.5	4-8	16.0	8.0	22.0	100
LNE-K-M18B-10	LNE-K-M18G-10	M18×1.5	5-10	18.0	8.0	24.0	100
LNE-K-M18B-14	LNE-K-M18G-14	M18×1.5	10-14	18.0	8.0	24.0	100
LNE-K-M20B-12	LNE-K-M20G-12	M20×1.5	6-12	20.0	9.0	27.0	50
LNE-K-M20B-14	LNE-K-M20G-14	M20×1.5	10-14	20.0	9.0	27.0	50
LNE-K-M22B-14	LNE-K-M22G-14	M22×1.5	10-14	22.0	10.0	28.0	50
LNE-K-M24B-14	LNE-K-M24G-14	M24×1.5	10-14	24.0	10.0	28.0	50
LNE-K-M25B-14	LNE-K-M25G-14	M25×1.5	10-14	25.0	10.0	28.0	50
LNE-K-M25B-18	LNE-K-M25G-18	M25×1.5	13-18	25.0	11.0	28.0	50
LNE-K-M27B-18	LNE-K-M27G-18	M27×1.5	13-18	27.0	11.0	30.0	50
LNE-K-M27B-18	LNE-K-M27G-18	M27×2.0	13-18	27.0	11.0	30.0	50
LNE-K-M30B-18	LNE-K-M30G-18	M30×2.0	13-18	30.0	11.0	30.0	50
LNE-K-M32B-21	LNE-K-M32G-21	M32×1.5	16-21	32.0	11.0	33.0	20
LNE-K-M33B-21	LNE-K-M33G-21	M33×2.0	16-21	33.0	11.0	40.0	20
LNE-K-M36B-25	LNE-K-M36G-25	M36×1.5	18-25	36.0	11.0	40.0	20
LNE-K-M40B-32	LNE-K-M40G-32	M40×1.5	22-32	40.0	11.0	40.0	10
LNE-K-M42B-32	LNE-K-M42G-32	M42×2.0	22-32	42.0	11.0	40.0	10
LNE-K-M48B-32	LNE-K-M48G-32	M48×2.0	22-32	48.0	13.0	45.0	10
LNE-K-M50B-38	LNE-K-M50G-38	M50×1.5	32-38	50.0	17.0	47.0	10
LNE-K-M63B-44	LNE-K-M63G-44	M63×1.5	37-44	63.0	17.0	47.0	10

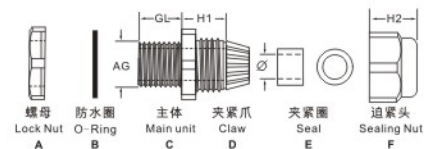

LNE-K 塑料电缆防水接头
Nylon Waterproof Cable Gland




产品材质: A,C,D,F部位采用尼龙制成, B,E部位采用丁腈橡胶制成。
 螺纹尺寸: 德制 (PG)、英制 (G)
 工作温度: -40°C至+100°C, 短时可达+120°C。
 产品颜色: 黑色、灰色 (特殊颜色可定做)。
 产品认证: RoHS认证、CE认证
 防护等级: IP68
 产品特性: 特殊夹紧爪与密封件特殊设计, 配合迫紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。

Product material are: Part A, C, D and F are PA material; Part B and E Chemigum material.
Specification of thread: PG, G
Working temperature: -40°C ~ +100°C, instantaneously can be 120°C.
Color: Black and gray (Customized colors are available).
Certification: RoHS, CE
Protection classification: IP68
Property: With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification has a scope clamping with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

SGS RoHS CE

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	螺纹标准(德制) Thread standard(PG)	卡口范围(mm) Range Of Bayonet	外径(mm) Outer Diameter	螺纹长度(mm) Thread Length	(mm)	包装单位(只/包) Packaging Unit
No.	No.	PG	Φ	AG	GL	H1+H2	PCS
LNE-K-PG7B	LNE-K-PG7G	PG7	3-6	12.5	8.0	20.0	100
LNE-K-PG9B	LNE-K-PG9G	PG9	4-8	15.2	8.0	22.0	100
LNE-K-PG11B	LNE-K-PG11G	PG11	5-10	18.6	8.0	24.0	100
LNE-K-PG13.5B	LNE-K-PG13.5G	PG13.5	6-12	20.4	9.0	27.0	50
LNE-K-PG16B	LNE-K-PG16G	PG16	10-14	22.5	10.0	28.0	50
LNE-K-PG21B	LNE-K-PG21G	PG21	13-18	28.3	11.0	30.0	50
LNE-K-PG29B	LNE-K-PG29G	PG29	18-25	37.0	11.0	38.0	20
LNE-K-PG36B	LNE-K-PG36G	PG36	22-32	47.0	13.0	45.0	10
LNE-K-PG42B	LNE-K-PG42G	PG42	32-38	54.0	13.0	47.0	10
LNE-K-PG48B	LNE-K-PG48G	PG48	37-44	59.3	14.0	47.0	10

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	螺纹标准(英制) Thread standard(G)	卡口范围(mm) Range Of Bayonet	外径(mm) Outer Diameter	螺纹长度(mm) Thread Length	(mm)	包装单位(只/包) Packaging Unit
No.	No.	G	Φ	AG	GL	H1+H2	PCS
LNE-K-G1/4B-8	LNE-K-G1/4G-8	G1/4	4-8	13.2	8.0	22.0	100
LNE-K-G3/8B-10	LNE-K-G3/8G-10	G3/8	5-10	16.5	8.0	24.0	100
LNE-K-G1/2B-12	LNE-K-G1/2G-12	G1/2	6-12	21.3	9.0	27.0	50
LNE-K-G1/2B-14	LNE-K-G1/2G-14	G1/2	10-14	21.3	10.0	28.0	50
LNE-K-G3/4B-18	LNE-K-G3/4G-18	G3/4	13-18	26.6	11.0	30.0	50
LNE-K-G1B-21	LNE-K-G1G-21	G1	16-21	33.4	11.0	40.0	20
LNE-K-G1B-25	LNE-K-G1G-25	G1	18-25	33.4	13.0	45.0	20
LNE-K-G1-1/4B-32	LNE-K-G1-1/4G-32	G1-1/4	22-32	42.1	13.0	45.0	10
LNE-K-G1-1/2B-32	LNE-K-G1-1/2G-32	G1-1/2	22-32	47.8	13.0	45.0	10
LNE-K-G2B-44	LNE-K-G2G-44	G2	37-44	59.6	17.0	47.0	10

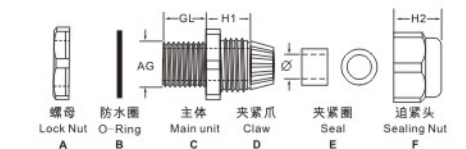

LNE-KD 多孔塑料电缆防水接头 Multi Hole Nylon Waterproof Cable Gland




产品材质: A,C,D,F部位采用尼龙制成, B,E部位采用丁腈橡胶制成。
螺纹尺寸: 德制 (PG)
工作温度: -40°C至+100°C, 短时可达+120°C。
产品颜色: 黑色、灰色 (特殊颜色可定做)。
产品认证: RoHS认证、CE认证
防护等级: IP68
产品特性: 特殊夹紧爪与密封件特殊之设计, 配合迫紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。

Product material: Part A, C, D and F are PA material; Part B and E are Chemigum material.
Specification of thread: PG
Working temperature: -40°C ~ +100°C, instantaneously can be 120°C.
Color: Black and gray (Customized colors are available)
Certification: RoHS, CE
Protection classification: IP68
Property: With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification has a scope clamping with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

SGS RoHS CE

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	螺纹标准(德制) Thread standard (PG)	孔数×孔径(mm) Hole Count×Bore Diameter	外径(mm) Outer Diameter	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	No.	PG	HxB	AG	GL	SW	PCS
LNE-KD-PG9/2×3B	LNE-KD-PG9/2×3G	PG9	2×3	15.2	6.5	18.0	100
LNE-KD-PG9/4×1B	LNE-KD-PG9/4×1G	PG9	4×1	15.2	6.5	18.0	100
LNE-KD-PG13.5/2×5B	LNE-KD-PG13.5/2×5G	PG13.5	2×5	20.4	7.5	22.0	50
LNE-KD-PG13.5/7×2B	LNE-KD-PG13.5/7×2G	PG13.5	7×2	20.4	7.5	22.0	50
LNE-KD-PG13.5/6×3B	LNE-KD-PG13.5/6×3G	PG13.5	6×3	20.4	7.5	22.0	50
LNE-KD-PG16/2×6B	LNE-KD-PG16/2×6G	PG16	2×6	22.5	7.0	24.0	50
LNE-KD-PG21/4×6B	LNE-KD-PG21/4×6G	PG21	4×6	28.3	8.0	30.0	50
LNE-KD-PG21/2×7B	LNE-KD-PG21/2×7G	PG21	2×7	28.3	8.0	30.0	50
LNE-KD-PG21/3×7B	LNE-KD-PG21/3×7G	PG21	3×7	28.3	8.0	30.0	50
LNE-KD-PG21/2×6/2×10B	LNE-KD-PG21/2×6/2×10G	PG21	2×6/2×10	28.3	8.0	30.0	50
LNE-KD-PG21/2×8B	LNE-KD-PG21/2×8G	PG21	2×8	28.3	8.0	30.0	50
LNE-KD-PG21/2×6B	LNE-KD-PG21/2×6G	PG21	2×6	28.3	8.0	30.0	50
LNE-KD-PG21/3×7B	LNE-KD-PG21/3×7G	PG21	3×7	28.3	8.0	30.0	50
LNE-KD-PG29/3×9B	LNE-KD-PG29/3×9G	PG29	3×9	37.0	9.5	40.0	20
LNE-KD-PG29/2×8.5B	LNE-KD-PG29/2×8.5G	PG29	2×8.5	37.0	9.5	40.0	20
LNE-KD-PG29/4×9B	LNE-KD-PG29/4×9G	PG29	4×9	37.0	9.5	40.0	20
LNE-KD-PG29/2×12B	LNE-KD-PG29/2×12G	PG29	2×12	37.0	9.5	40.0	20
LNE-KD-PG36/2×15B	LNE-KD-PG36/2×15G	PG36	2×15	47.0	12.0	50.0	10
LNE-KD-PG36/5×9B	LNE-KD-PG36/5×9G	PG36	5×9	47.0	12.0	50.0	10

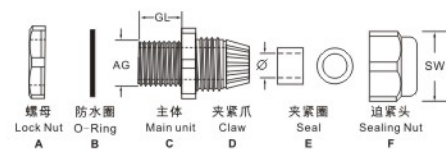

LNE-KFW 防折断塑料电缆接头 Anti-bending Nylon Cable Gland



产品材质: 采用尼龙制成, A部位采用丁腈橡胶制成。
螺纹尺寸: 公制 (M)、德制 (PG)
工作温度: -40°C至+100°C, 短时可达+120°C。
产品颜色: 黑色、灰色 (特殊颜色可定做)。
防护等级: IP68
产品特性: 特殊夹紧爪与密封件特殊之设计, 配合迫紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。

Product material: PA material; Part B and E are Chemigum.
Specification of thread: Metric, PG
Working temperature: -40°C ~ +100°C, instantaneously can be 120°C.
Color: Black and gray (Customized colors are available)
Protection classification: IP68
Property: With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification has a scope clamping with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

SGS RoHS CE

订货号 Order No.	螺纹标准(公制) Thread standard (M)	卡套范围(mm) Range Of Bayonet	外径(mm) Outer Diameter	(mm) D	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	M	Φ	AG	D	GL	SW1 SW2	PCS
LNE-KFW-M12	M12	3-6.5	12.0	6.8	8.5	15 18	50
LNE-KFW-M16	M16	4-8	16.0	10.3	10.0	19 22	50
LNE-KFW-M20	M20	8-12	20.0	14.3	10.0	27 27	50
LNE-KFW-M25	M25	13-18	25.0	18.4	10.0	33 33	50

订货号 Order No.	螺纹标准(德制) Thread standard (PG)	卡套范围(mm) Range Of Bayonet	外径(mm) Outer Diameter	(mm) D	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	M	Φ	AG	D	GL	SW1 SW2	PCS
LNE-KFW-PG7	PG7	3-6.5	12.5	6.8	8.5	15 17	50
LNE-KFW-PG9	PG9	4-8	15.2	8.2	6.0	19 22	50
LNE-KFW-PG11	PG11	5-10	18.6	10.3	6.0	22 24	50
LNE-KFW-PG13.5	PG13.5	8-12	20.4	12.3	6.5	24 27	50
LNE-KFW-PG16	PG16	10-14	22.5	14.3	6.5	27 30	50
LNE-KFW-PG21	PG21	13-18	28.3	18.4	7.0	33 36	50

